


ALIFLEX D DESCARGA




APPLICATION

Discharge of alimentary products such as wine, beer, milk, olive oil, fats, wax, fruit juice, etc. Developed for unloading docks in the food processing and transfer industries between liquid and pasty foodstuffs tanks. Flexible and easy to use product with excellent resistance to torsion and with great resistance to temperature changes. It can be sterilized with steam at 130 ° C for 30 minutes or with a 5% soda solution.

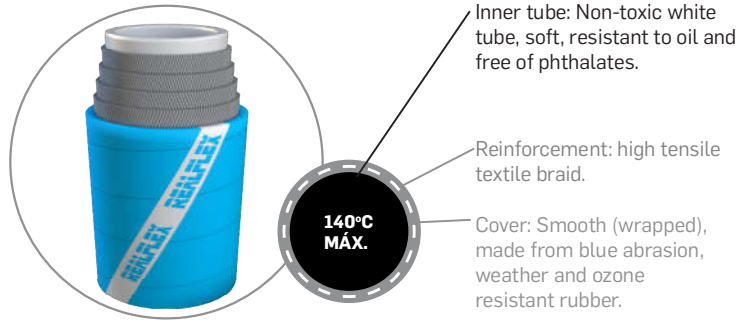

END FITTINGS



1/2"	7/8"	10	0,47	N/A	156	
1"	1 1/2"	10	0,93	N/A	300	
2"	2 1/2"	10	2,05	N/A	612	
3"	3 1/2"	10	3,38	N/A	912	
4"	4 5/8"	10	4,94	N/A	1212	
5"	5 3/4"	10	7,45	N/A	1524	
6"	6 3/4"	10	8,84	N/A	1824	

150PSI

1/2"	7/8"	10	0,47	N/A	156
1"	1 1/2"	10	0,93	N/A	300
2"	2 1/2"	10	2,05	N/A	612
3"	3 5/8"	10	3,19	N/A	912
4"	4 5/8"	10	3,88	N/A	1212
5"	5 7/8"	10	6,16	N/A	1524
6"	6 7/8"	10	7,25	N/A	1824

300PSI

