


EXAUSTFLEX FVBACH



APPLICATION

Recommended for transporting hot air and gas exhaustion, powders and suspended abrasive particles or air exhaustion for the chilling of electromagnetic inductors during services requiring a lightweight and flexible hose together with resistance to heat caused by irradiation, direct flames and splashes of incandescent materials.

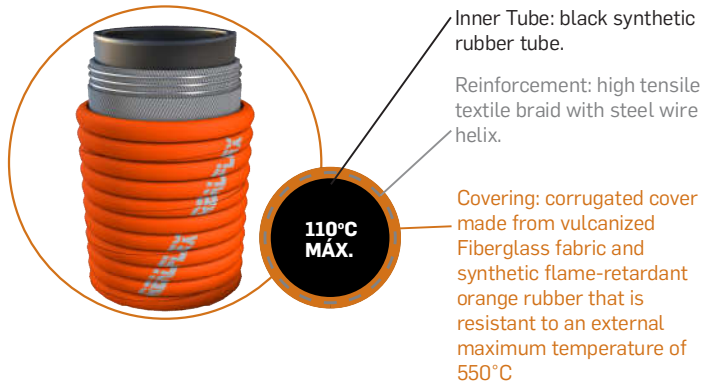

END FITTINGS



R

150PSI

4"	4 3/4"	20	5,13	560	612	
6"	6 3/4"	20	7,86	560	912	
8"	8 7/8"	20	11,09	560	1218	
10"	10 7/8"	10	13,39	560	1524	
12"	12 7/8"	10	17,19	560	1830	
14"	15 1/8"	10	23,38	560	2130	
16"	17 1/8"	10	26,61	560	2436	

