


# EXAUSTFLEX




## APPLICATION

Used in industry for the passage of hot air and the exhaustion of gases, powders and suspended abrasive particles; extremely lightweight and flexible.

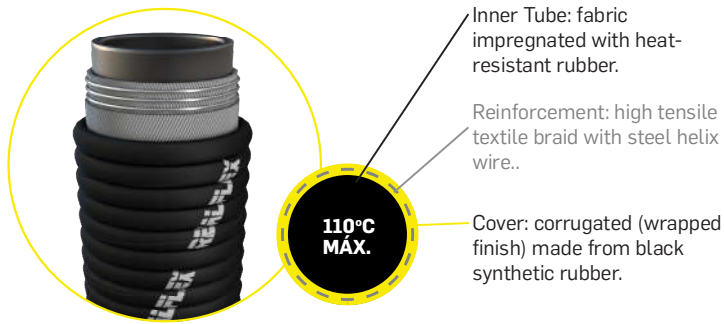

## END FITTINGS

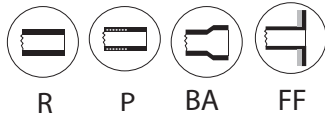

## 15 PSI

1"	1 1/2"	20	0,84	560	100
1 1/4"	1 3/4"	20	1,05	560	128
1 1/2"	1 7/8"	20	1,21	560	152
1 3/4"	2 1/4"	20	1,37	560	180
2"	2 1/2"	20	1,50	560	204
2 3/8"	2 7/8"	20	1,81	560	240
2 1/2"	2 7/8"	20	1,89	560	252
3"	3 5/8"	20	2,67	560	304
3 1/2"	3 7/8"	20	3,08	560	356
4"	4 1/2"	20	3,74	560	404
4 1/2"	5 1/8"	20	3,89	560	570
5"	5 1/2"	20	4,28	560	635
5 1/2"	5 7/8"	10	4,71	560	700
6"	6 5/8"	20	5,72	560	760
6 1/2"	7 1/8"	10	6,19	560	825
8"	8 5/8"	20	7,60	560	1015
10"	10 5/8"	20	9,07	560	1270
12"	12 5/8"	20	10,82	560	1830

