

RIGFLEX DISCHARGE



**80°C
MAX.**

Inner Tube: tube made from black synthetic rubber resistant to oils and bulk material in general

Reinforcement: high tensile textile braid with static conductive filament.


Cover: smooth (wrapped), made from black rubber that is oil, abrasion, ozone and weather resistant with a blue continuous transfer label.

APPLICATION

Recommended for the discharge of a wide variety of fluids and solids on oil rigs, and for supply between boats and offshore platforms. Traction resistant: 4 tons



END FITTINGS

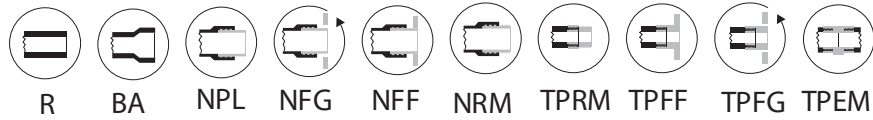

300PSI

2"	2 3/4"	20	2,01	N/A	408	
3"	3 3/4"	20	2,88	N/A	608	
4"	4 3/4"	20	3,73	N/A	808	
5"	5 3/4"	20	4,58	N/A	1016	
6"	6 7/8"	20	6,89	N/A	1216	
8"	9 1/8"	20	12,66	N/A	1624	
10"	11 1/8"	20	15,62	N/A	2032	

