

SUCTION AND DISCHARGE OF CHEMICAL PRODUCTS



Inner Tube: butyl rubber inner tube.

Reinforcement: high tensile textile braid with steel helix wire intercalado

80°C MÁX.


Cover: smooth (wrapped), made from black rubber that is abrasion, weather and ozone resistant with a violet continuous transfer label.

APPLICATION

Robust hose indicated for heavy services of suction and discharge of a large amount of chemical products (acids, bases, oxidizing solutions and contaminated industrial waters) used in the industry. Full-face end fittings available up to 150PSI pressure only, above only stainless steel integral nipples.



END FITTINGS

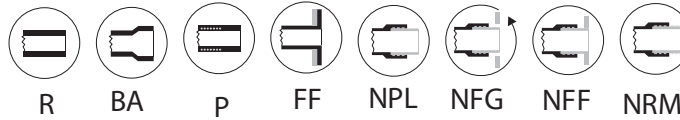

	R	BA	p	FF	NPL	NFG
1"						
1 1/4"						
1 1/2"						
2"						
3"						
4"						
6"						
8"						

75PSI

	R	BA	p	FF	NPL	NFG
1"						
1 1/4"						
1 1/2"						
2"						
3"						
4"						
6"						
8"						

150PSI

	R	BA	p	FF	NPL	NFG
1"						
1 1/4"						
1 1/2"						
2"						
3"						
4"						
6"						
8"						

300PSI

