

SUCTION AND DISCHARGE OF OIL HD



Inner Tube: black synthetic rubber tube resistant to oil derivatives, biodiesel and alcohol.

Reinforcement: high tensile textile braid with a steel helix wire and static conductive filament.


CCover: smooth (wrapped), made from blue rubber that is abrasion, weather and oil derivative resistant.

80°C MAX.

APPLICATION
 Recommended for heavy-duty oil derivative suction and discharge services covering a wide range of fuels, such as: gasoline, alcohol, biodiesel, and diesel oil, among others. Full-face end fittings not available for this product.



END FITTINGS

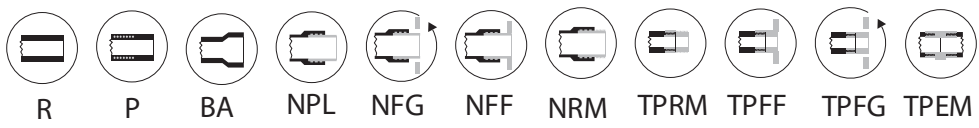

75PSI

| 1" | 1 3/4" | 20 | 1,47 | 620 | 150 | |
|--------|--------|----|------|-----|-----|--|
| 1 1/4" | 1 7/8" | 20 | 1,81 | 620 | 192 | |
| 1 1/2" | 2 1/4" | 20 | 2,28 | 620 | 228 | |
| 2" | 2 7/8" | 20 | 3,07 | 620 | 306 | |
| 2 1/2" | 3 3/8" | 20 | 3,68 | 620 | 378 | |
| 3" | 3 7/8" | 20 | 4,45 | 620 | 456 | |
| 4" | 5 1/8" | 20 | 7,84 | 620 | 606 | |
| 5" | 5 7/8" | 20 | 8,62 | 620 | 762 | |

150PSI

| | | | | | |
|--------|--------|----|-------|-----|------|
| 1" | 1 3/4" | 20 | 1,51 | 620 | 150 |
| 1 1/2" | 2 1/4" | 20 | 2,28 | 620 | 228 |
| 2" | 2 7/8" | 20 | 2,86 | 620 | 306 |
| 3" | 3 7/8" | 20 | 4,62 | 620 | 456 |
| 4" | 4 7/8" | 20 | 6,66 | 620 | 606 |
| 5" | 6 1/8" | 20 | 9,69 | 620 | 762 |
| 6" | 7 3/8" | 20 | 14,04 | 620 | 912 |
| 8" | 9 1/2" | 20 | 21,10 | 620 | 1218 |

300PSI

| | | | | | |
|--------|--------|----|-------|-----|------|
| 1" | 1 7/8" | 20 | 1,64 | 620 | 150 |
| 1 1/2" | 2 1/4" | 20 | 2,28 | 620 | 228 |
| 2" | 2 7/8" | 20 | 3,19 | 620 | 306 |
| 3" | 4 1/8" | 20 | 5,91 | 620 | 456 |
| 4" | 5 1/4" | 20 | 8,66 | 620 | 606 |
| 5" | 6 3/8" | 20 | 11,82 | 620 | 762 |
| 6" | 7 1/2" | 20 | 15,91 | 620 | 912 |
| 8" | 9 7/8" | 20 | 27,90 | 620 | 1218 |



Technical characteristics subject to change without prior notice