



# VAPOR

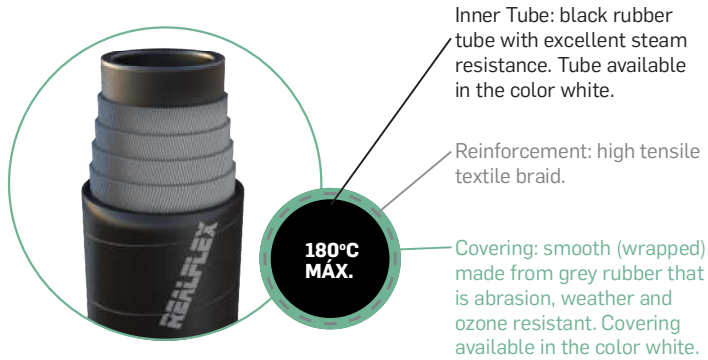

## APPLICATION

Recommended for use in saturated steam where the maximum working pressure does not surpass 150psi or hot water where the working pressure does not surpass 300psi. Maximum work temperature: 180°C.

## END FITTINGS



### 150PSI (steam) 300PSI (hot water)

1/2"	1 1/4"	20	0,73	N/A	156	
5/8"	1 1/2"	20	1,04	N/A	192	
3/4"	1 5/8"	20	1,17	N/A	228	
1"	1 7/8"	20	1,73	N/A	300	
1 1/4"	2 3/8"	20	2,46	N/A	384	
1 1/2"	2 5/8"	20	2,77	N/A	456	
1 3/4"	2 7/8"	20	3,14	N/A	540	
2"	3 3/8"	20	4,32	N/A	612	
2 1/2"	3 7/8"	20	5,83	N/A	756	
3"	4 1/2"	20	6,75	N/A	912	
4"	5 1/2"	20	8,56	N/A	1212	

